

Cable espiral SPK




El cable se fabrica y se comprueba en condiciones industriales de alta calidad. Se garantiza, con 100.000 ciclos, una aplicación segura también en condiciones de trabajo muy extremas.
el factor: 4

Los cables espirales, con su especial recubrimiento, son resistentes a: microbios, hidrólisis y casi todos los aceites minerales. Además de esto, los cables espirales son resistentes a los rayos UV.

Material PUR / PUR negro. Colores de los hilos de acuerdo con DIN 47100; Negro, Blanco, Verde, Amarillo y Negro. Cables finales (ver tabla) sin cubrir de 40mm en cada lado y terminales prensados.




Designación	Longitud del espiral	extended length	Fin 1 (AE1)	Fin 2 (AE2)	Número de artículo
3 hilos					
SPK 3x0,5mm ²	750	3000	200	200	314769
SPK 3x0,5mm ²	900	3600	200	200	314780
SPK 3x0,5mm ²	900	3600	4000	350	314927
SPK 3x0,5mm ²	750	3000	500	200	314931
SPK 3x0,5mm ²	600	2400	500	200	314921
SPK 3x0,5mm ²	950	3800	500	200	314924
4 hilos					
SPK 4x0,25mm ²	750	3000	200	200	314851
SPK 4x0,25mm ²	900	3600	1000	400	314772
SPK 4x0,25mm ²	1200	4800	4000	400	314774
SPK 4x0,25mm ²	900	3600	2000	350	314455
5 hilos					
SPK 5x0,25mm ²	500	2000	1000	200	314767
SPK 5x0,25mm ²	750	3000	200	200	314721
SPK 5x0,25mm ²	800	3200	1500	200	314765
SPK 5x0,25mm ²	900	3600	200	300	314745
SPK 5x0,25mm ²	900	3600	2000	350	314923
SPK 5x0,25mm ²	1000	4000	1000	1500	314874

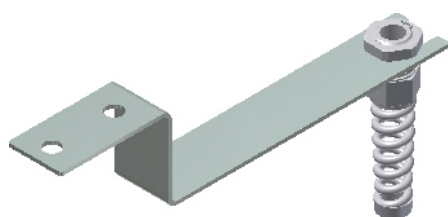


modelo

HW-SPK-SV16




número de artículo

315097

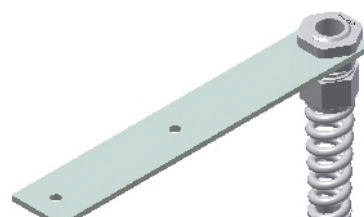

modelo

HW-SPK-160/25-SV16



número de artículo

315098

SPK spiral cable




Produced in high industrie quality, tested and guaranteed for 100.000 cycles in use under very harsh conditions. Achievement of high reset force and extension length.

Excerpt factor: 4


Due to the specially designed mixture of the casing the spiral cable is resistant against: microbes, hydrolysis and almost every mineral oil. Further more the spiral cable is UV-resistant and free of halogen.

Material PUR/PUR black, core colors according to DIN 47100: brown, white, green, yellow and black

Variable wire ends (see table), 40mm on both ends without sheathing and with core end sleeve (CES)

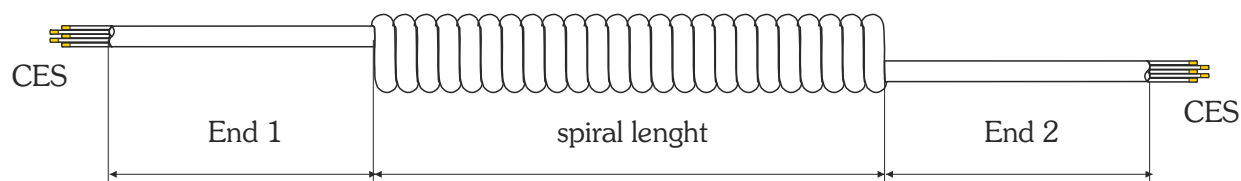

name	spiral length	extended lenght	end 1 (AE1)	end 2 (AE2)	order-no.
3-pin					
SPK 3x0,5mm ²	750	3000	200	200	314769
SPK 3x0,5mm ²	900	3600	200	200	314780
SPK 3x0,5mm ²	900	3600	4000	350	314927
SPK 3x0,5mm ²	750	3000	500	200	314931
SPK 3x0,5mm ²	600	2400	500	200	314921
SPK 3x0,5mm ²	950	3800	500	200	314924
4-pin					
SPK 4x0,25mm ²	750	3000	200	200	314851
SPK 4x0,25mm ²	900	3600	1000	400	314772
SPK 4x0,25mm ²	1200	4800	4000	400	314774
SPK 4x0,25mm ²	900	3600	2000	350	314455
5-pin					
SPK 5x0,25mm ²	500	2000	1000	200	314767
SPK 5x0,25mm ²	750	3000	200	200	314721
SPK 5x0,25mm ²	800	3200	1500	200	314765
SPK 5x0,25mm ²	900	3600	200	300	314745
SPK 5x0,25mm ²	900	3600	2000	350	314923
SPK 5x0,25mm ²	1000	4000	1000	1500	314874

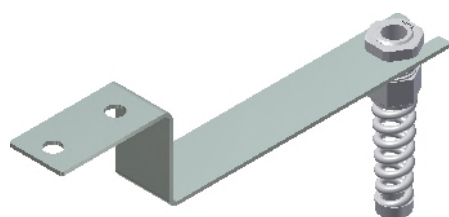


model

HW-SPK-SV16

order no.

315097

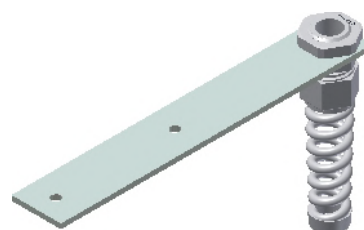

model

HW-SPK-160/25-SV16

order no.

315098